


## GW & TW Commercial Catering Element Immersion Heater

1" BSP Screw threaded immersion heater are ideal for water heating and also for weak solution. Sheath materials are incoloy 800 or SUS316 for more durability and Longer life Span.

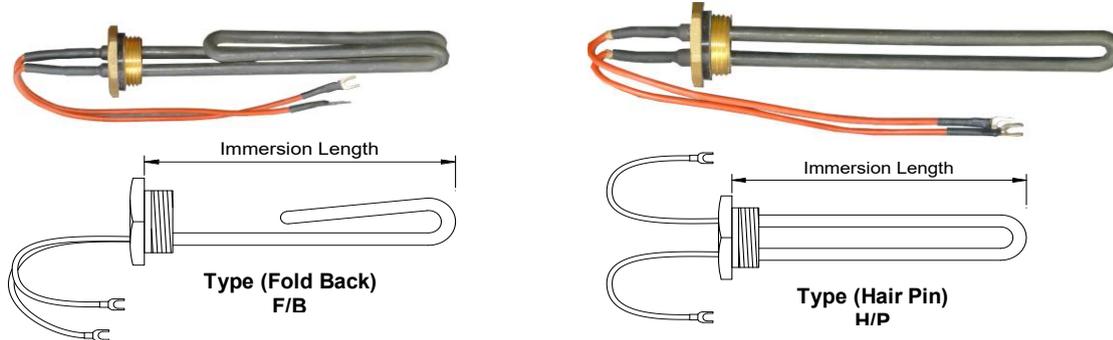


### Single Element

Model No.	Voltage	Wattage	Sheath Material	Immersion Length	Type
TW-1205	240V	500W	Incoloy	155mm	F/B (Short)
TW-1204	240V	800W	Incoloy	155mm	F/B (Short)
TW-1201	240V	1000W	Incoloy	155mm	F/B (Short)
TW-1200	240V	2000W	Incoloy	155mm	F/B (Short)
TW-1202	240V	1500W	Incoloy	155mm	F/B (Short)
TW-1203	240V	2400W	Incoloy	155mm	F/B (Short)

Model No.	Voltage	Wattage	Sheath Material	Immersion Length	Type
TW-52W0	240V	3600W	Incoloy	197mm	F/B (Long)
TW-52W1	240V	3000W	Incoloy	190mm	F/B (Long)
TW-52W2	240V	2400W	Incoloy	180mm	F/B (Long)
TW-52Y0	240V	4800W	Incoloy	260mm	F/B (Long)
TW-67V0	240V	3000W	Incoloy	295mm	F/B (Long)
TW-67W0	240V	3600W	Incoloy	345mm	F/B (Long)
TW-67X0	240V	4800W	Incoloy	445mm	F/B (Long)

Model No.	Voltage	Wattage	Sheath Material	Immersion Length	Type
TW-52R0	240V	1500W	Incoloy	190mm	H/P
TW-52T0	240V	2000W	Incoloy	205mm	H/P
TW-67Q0	240V	1200W	Incoloy	240mm	H/P
TW-67P0	240V	900W	Incoloy	188mm	H/P

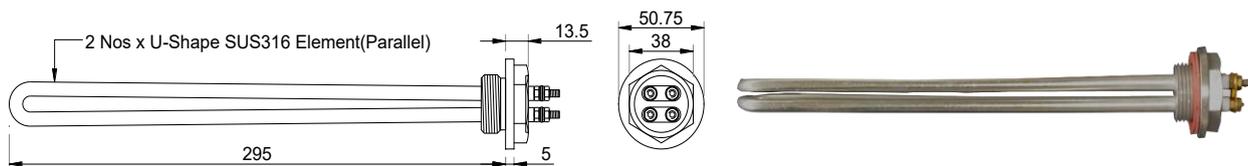

### Double Element

Model No.	Voltage	Wattage	Sheath Material	Immersion Length	Type
TW-53W01 2X1.5KW	240V	3000W	SUS316	295mm	H/P
TW-53W03 2X2.0KW	240V	4000W	SUS316	295mm	H/P