


GW Defrost and Evaporator Coil Elements.


These Heaters are commonly use in Commercial Refrigerator, Freezers and Domestic refrigerator To Keep Refrigerator and Freezer Frost Free

6.5mmØ Sheath

| Part No. | Volt | Watt | MAX REACH | Wire Length |
|-----------------|------|------|-----------|-------------|
| GW VT990000 S/L | 240 | 350 | 510 | 500 |
| GW VB070000 S/L | 240 | 450 | 710 | 500 |
| GW VB07A000 S/L | 240 | 500 | 770 | 500 |
| GW VW85H000 S/L | 230 | 552 | 1025 | 1000 |
| GW VW34B000 S/L | 240 | 160 | 508 | 500 |
| GW VW020000 S/L | 230 | 90 | 1135 | 1000 |
| GW VW02A000 S/L | 230 | 320 | 2150 | 1000 |

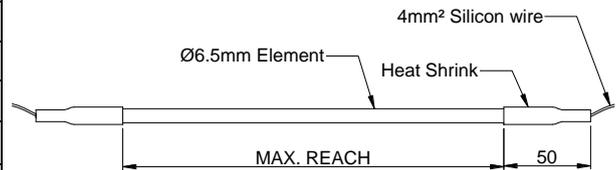


| Part No. | Volt | Watt | MAX REACH | | Wire Length |
|-----------------|------|------|------------|---|-------------|
| | | | A | B | |
| GW VT990000 'C' | 240 | 350 | 420 X 80MM | | 500 |
| GW VB070000 'C' | 240 | 450 | 520 X 80MM | | 500 |

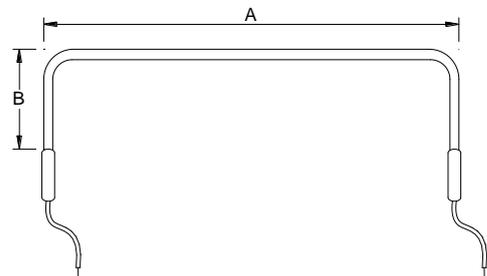


6.5mmØ Sheath 'U' Shape Upright Terminal

| Part No. | Rating | | Dim A (mm) | Dim B (mm) | Dim C (mm) |
|-----------------|--------|------|------------|------------|------------|
| | Volt | Watt | | | |
| GW VT990000 'U' | 240 | 350 | 225 | 55 | 45 |
| GW VB07A000 'U' | 240 | 500 | 355 | 55 | 45 |
| GW VB070000 'U' | 240 | 450 | 325 | 55 | 45 |
| GW VW85H000 'U' | 230 | 552 | 480 | 55 | 45 |
| GW VW34B000 'U' | 240 | 160 | 225 | 55 | 45 |
| GW VW020000 'U' | 230 | 90 | 538 | 55 | 45 |
| GW VW02A000 'U' | 230 | 320 | 1045 | 55 | 45 |

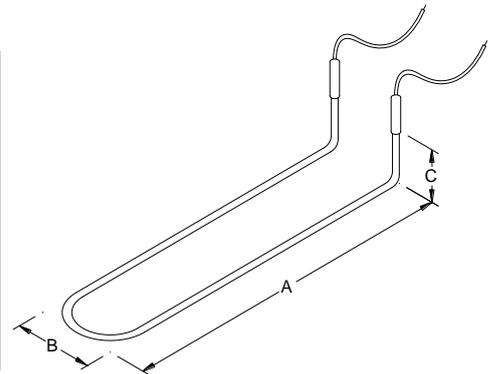


6.5mmØ Sheath 'U' Shape

| Part No. | Volt | Watt | MAX REACH |
|-------------|------|------|-----------|
| GW VW98B000 | 230 | 1230 | 1010 |
| GW VW98C000 | 230 | 1780 | 1485 |
| GW VW98D000 | 230 | 2265 | 1920 |
| GW VW98E000 | 230 | 2630 | 2200 |

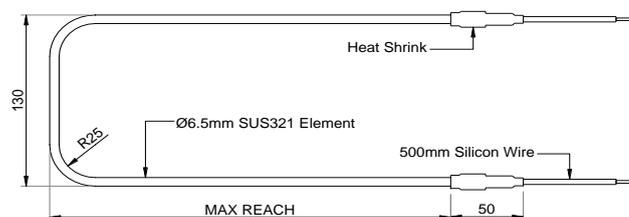


6.5mmØ Sheath 'U' Shape

| Part No. | Volt | Watt | MAX REACH |
|-------------|------|------|-----------|
| GW VP35A000 | 230 | 750 | 805 |
| GW VP35A001 | 230 | 300 | 805 |
| GW VP35B000 | 230 | 750 | 715 |
| GW VP35B001 | 230 | 300 | 715 |
| GW VP35C000 | 230 | 750 | 1225 |
| GW VP35C001 | 230 | 1500 | 1225 |
| GW VP35E000 | 230 | 1500 | 1025 |
| GW VP35E001 | 230 | 750 | 1025 |

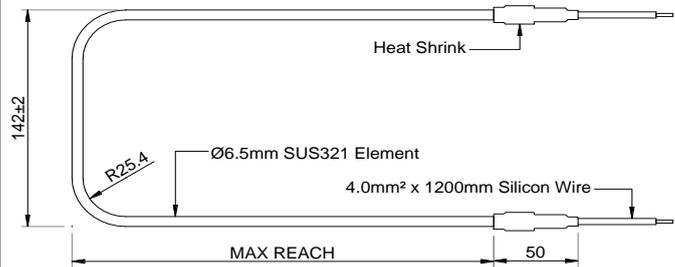


8.0mmØ Sheath

| Part No. | Volt | Watt | MAX REACH |
|-------------|------|------|-----------|
| GW VP350000 | 230 | 1500 | 1025 |
| GW VP350001 | 230 | 750 | 1025 |
| GW VP35D000 | 230 | 1500 | 1975 |
| GW VP35D001 | 230 | 750 | 1975 |
| GW VP35D002 | 230 | 2600 | 1975 |

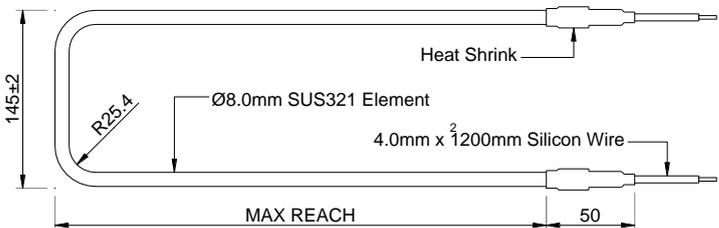


8.0mmØ Sheath

| Part No. | Volt | Watt | MAX REACH |
|-------------|------|------|-----------|
| GW VN42J000 | 240 | 2600 | 2530 |

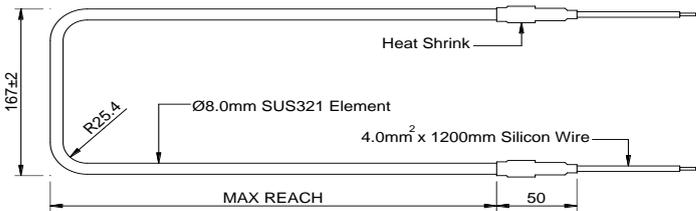

8.0mmØ Sheath

| Part No. | Rating | | Dim A (mm) | Dim B (mm) | Dim C (mm) |
|-------------|--------|------|------------|------------|------------|
| | Volt | Watt | | | |
| GW VW950000 | 220 | 500 | 720 | 80 | 80 |
| GW VW95A000 | 220 | 350 | 460 | 80 | 80 |
| GW VW95B000 | 220 | 400 | 560 | 80 | 80 |
| GW VW95C000 | 220 | 600 | 960 | 80 | 80 |
| GW VW95D000 | 220 | 800 | 1150 | 80 | 80 |

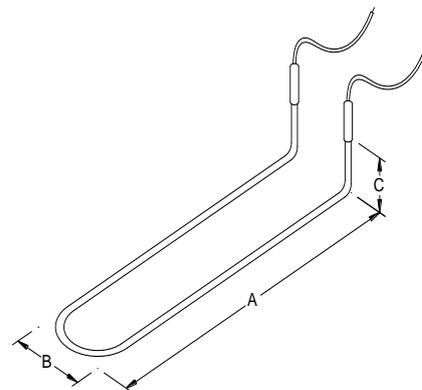

VW95 Series