

RIKO[®] Ceramic Connectors With/Without Fixing Hole

Porcelain is the oldest and most natural material in the world for electrical insulation. It is heat-resistant, non-corrosive, non-inflammable and resistant to various chemicals. These connector blocks are designed to withstand use in high temperature applications and direct connection to very high components (e.g. heating elements) is possible. The max ambient temperature should not exceed 200°C.

Feature:

Housing : Porcelain C111, IEC 672-1, Glazed

Insert : Nickel-Plated Brass (Galvanized)

Screw : Zinc-Plated Steel (Galvanized)

Dimension Tolerance $\pm 1 \sim 1.5\text{mm}$ **Ceramic Connectors Rectangle with Fixing Hole**

Model No.	2-402Z-2
Rating	450V 10Amps
Poles	2
Clamping Area	1.5~6mm ²
Dimension L x B x H (mm)	20 x 18 x 15.5
Standard Packing	100 Pcs



Model No.	2-403Z-3
Rating	450V 10Amps
Poles	3
Clamping Area	1.5~6mm ²
Dimension L x B x H (mm)	32 x 17 x 15
Standard Packing	100 Pcs



Model No.	2-424-4 (10A)
Rating	450V 10Amps
Poles	4
Clamping Area	1.5~6mm ²
Dimension L x B x H (mm)	48 x 24 x 17
Standard Packing	50 Pcs



Model No.	2-1602-2
Rating	450V 16Amps
Poles	2
Clamping Area	2.5~10mm ²
Dimension L x B x H (mm)	24 x 22 x 21
Standard Packing	50 Pcs



Model No.	2-1603-3
Rating	450V 16Amps
Poles	3
Clamping Area	2.5~10mm ²
Dimension L x B x H (mm)	37 x 23.5 x 23
Standard Packing	50 Pcs



Model No.	2-2021-2
Rating	450V 32Amps
Poles	2
Clamping Area	2.5~16mm ²
Dimension L x B x H (mm)	33 x 30 x 22.5
Standard Packing	50 Pcs



Model No.	2-2031-3
Rating	450V 32Amps
Poles	3
Clamping Area	2.5~16mm ²
Dimension L x B x H (mm)	51 x 30 x 23
Standard Packing	50 Pcs

Country of Origin: Made In Germany

REACH ELECTRICAL (S) PTE LTD

51 Ubi Ave 1, #03-05, Paya Ubi Industrial Park, Singapore 408933


Tel: (65) 6296 6860 Fax: (65) 6298 1443

Email: reach@singnet.com.sgWebsite: <http://www.reachelectrical.com>

Company's Reg. No. : 199004352W G.S.T Reg. No. : M2-0095215-4



Model No.	MJ-75 2P, 35AMP
Rating	450V 35Amps
Poles	2
Clamping Area	Fork Lug
Dimension L x B x H (mm)	40 x 31 x 19
Standard Packing	-

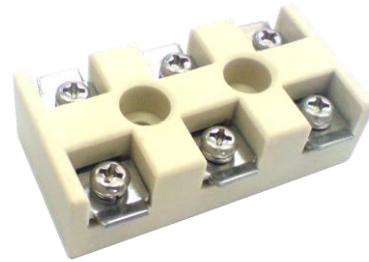

Model No.	MJ-76 3P, 35AMP
Rating	450V 35Amps
Poles	3
Clamping Area	Fork Lug
Dimension L x B x H (mm)	61 x 31 x 19
Standard Packing	-



Model No.	MJ-77 4P, 35AMP
Rating	450V 35Amps
Poles	4
Clamping Area	Fork Lug
Dimension L x B x H (mm)	95 X 29 X 20
Standard Packing	-

Country Of Origin: Made In Taiwan**Ceramic Connectors Round without Fixing Hole**

Model No.	1-302-2
Rating	450V 10Amps
Poles	2
Clamping Area	1.5~6mm ²
Dimension L x Ø (mm)	15mmØ x 19
Standard Packing	100 Pcs



Model No.	1-303-3
Rating	450V 10Amps
Poles	3
Clamping Area	1.5~6mm ²
Dimension L x Ø (mm)	16mmØ x 23
Standard Packing	100 Pcs

Ceramic Connectors Rectangle without Fixing Hole

Model No.	1-111-1
Rating	450V 10Amps
Poles	1
Clamping Area	1.5~6mm ²
Dimension L x B x H (mm)	8.5 x 20 x 17
Standard Packing	100 Pcs



Model No.	1-211-1
Rating	450V 32Amps
Poles	1
Clamping Area	2.5~16mm ²
Dimension L x B x H (mm)	14 x 30 x 25
Standard Packing	100 Pcs

Country Of Origin: Made In Germany

REACH ELECTRICAL (S) PTE LTD

51 Ubi Ave 1, #03-05, Paya Ubi Industrial Park, Singapore 408933

Tel: (65) 6296 6860 Fax: (65) 6298 1443

Email: reach@singnet.com.sgWebsite: <http://www.reachelectrical.com>

Company's Reg. No. : 199004352W G.S.T Reg. No . M2-0095215-4